


CONE CRUSHER CH SERIES

CH660

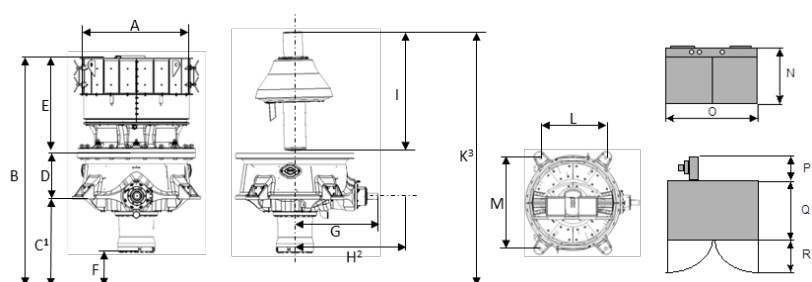

DIMENSIONS (mm)

A	B	C'	D	E	F	G	H ²	I	K ³	L	M	N	O	P	Q	R
2 104	4 250	1 600	860	1 755	630	1 497	2 156	2 349	4 835	2 103	1 528	993	1 766	951	1 252	691

WEIGHTS (kg)

Feed hopper	Spider cap	Topshell, complete	Mainshaft assembly complete	Eccentric, complete	Bottomshell assembly complete	Pinionshaft housing complete	Hydroset cylinder complete	Total Weight (approx.)	Oil tank
995	340	8 440	5 890	1 165	10 100	565	1 443	26 760	520

PERFORMANCE

Nominal capacities MTPH		Chamber	EC	CX	C	MC	M	MF	F	EF
		CSS	130-150	120-140	110-130	90-110	-	-	-	-
		SH	235	215	190	155	120	100	75	45
		TS	275	245	215	175	135	115	85	50
Max motor power (kW)			315	315	315	315	315	315	315	315
Ecc. Throw (mm)			18-48	18-48	18-48	18-48	18-50	18-50	18-50	18-50
CSS (mm)		8	-	-	-	-	-	-	-	78-122
		10	-	-	-	-	-	-	-	83-231
		13	-	-	-	-	-	123-192	107-261	90-251
		16	-	-	156-209	151-268	139-308	133-369	92-320	97-238
		19	130-173	149-265	168-410	162-431	149-414	143-396	99-343	105-232
		22	139-308	159-424	179-478	173-460	159-442	152-423	106-367	112-199
		25	148-394	169-451	191-509	184-490	169-470	162-450	112-390	119-185
		29	159-425	183-487	206-550	198-529	183-508	175-486	121-421	128-143
		32	168-449	193-514	218-580	209-558	193-536	185-513	128-445	-
		35	177-472	203-541	229-611	220-588	203-564	194-518	135-449	-
		38	186-496	213-569	240-641	231-617	213-521	204-454	163-393	-
		41	195-520	223-596	252-672	242-539	223-447	214-428	148-329	-
		44	204-543	233-571	263-644	253-507	233-415	224-348	194-301	-
		48	215-527	247-494	279-557	268-417	247-329	237-263	205-228	-
		51	224-499	257-400	290-451	279-310	257	-	-	-
Standard Mantles			A/B	A/B	A/B	A/B/HC	A/B/HC	A/B/HC	A/B/HC	EF