



DS312D ROCK SUPPORT BOLTER

TECHNICAL SPECIFICATION

Sandvik DS312D is a one-man-operated rock bolter for rock reinforcement in underground mines with small and medium cross sections.

The Sandvik DS312D is the ultimate versatile rock bolter. Powered in tramming and drilling by low emissions diesel engine (Tier 3, Tier 4F, Canmet or Stage V), the Sandvik DS312D can be used for both rehabilitation or rock reinforcement in production areas.

Sandvik DS312D can install most common rock bolts, ranging in length from 1.5 m to 3 m (5' to 10'), at a height up to 7.7 m (25').

The operator works under supported ground, protected under a FOPS certified cabin structure.

Mechanization of the bolting process ensures efficient, constant and durable rock bolt integrity.

Built from proven and reliable components, Sandvik DS312D is designed for high availability.

The Sandvik DS312D used RD314 rock drill for fast performance, installed on the Sandvik Bolting Head with low operating cost and optional Sandvik Bolting Instrumentation system.

With the SB40SH screen handler and its 360° continuous rotation, the Sandvik DS312D allows fast mechanized meshing process.

KEY FEATURES

Coverage area	6 350 x 2 100 mm (roof)
Hydraulic rock drill	1 x RD314, 14 kW
Bolting head	1 x SBH, (5' to 10')
Boom	1 x B26XLB
Screen handler boom	1 x SB40SH
Turning width (T-section)	4 610 mm (with SBH7 and B26B)
Transport width	2 020 mm
Transport height (canopy)	2 140 mm / 3 100 mm
Transport height (cabin)	2 920 mm or 2 670 mm
Transport length	12 450 mm (with SBH8)
Total weight	16 000 - 18 000 kg depending on options



1. SANDVIK DS312D - ROCK SUPPORT BOLTER

HYDRAULIC ROCK DRILL

Type of rock drill	RD314 (TS2-137)
Percussion power	14 kW
Percussion pressure	Max. 180 bar
Percussion rate	110 Hz
Rotation speed	Max. 530 rpm
Rotation torque	Max. 340 Nm
Hole size	33 - 43 mm (1"5/16 - 1"23/32)
Recommended rod	R32 - HEX25 - R25
Shank adapter	R32 female
Weight	115 kg
Filling device for accumulators	Specification TS2-430

BOLTING HEAD

SBH (TS2-208)		SBH5	SBH6	SBH7	SBH8	SBH10
Bolt length	mm	1 525	1 830	2 135	2 440	3 050
Drill steel length	mm	1 975	2 175	2 475	2 795	3 405
Hole depth	mm	1 755	1 950	2 250	2 570	3 185
Total length (A) (drilling)	mm	2 520	2 820	3 120	3 440	4 090
Total length (B) with RHR50 (bolting)	mm	2 710	3 010	3 310	3 630	4 280
Total length (B) with RD315 (bolting)	mm	2 770	3 070	3 370	3 690	4 340
Recommended operating height with RD315 (min.)	mm	2 970	3 270	3 570	3 890	4 540
Total weight*	kg	1 040	1 070	1 100	1 150	1 280

Dimensions +/- 5 mm

*The weights are theoretical and given for information
Dimensions and weights are for a bolting head equipped

BOOM

Type of boom	B26XLB (TS2-207)
Boom extension	1 700 mm
Boom weight, net	1 500 kg
Roll-over angle	360°

SCREEN HANDLER BOOM

Type of screen handler boom	SB40SH (TS2-442)
Boom coverage	Up to 6.2 x 6.2 m drift
Boom swing	± 90° (180°)
First boom lift (up / down)	60°
Secondary boom lift (up / down)	140°
Boom extension	1 700 mm
Screen handler tilt	± 90° (180°)
Manipulator roll-over	± 90° (180°)
Screen roll-over	360° (continuous)
Max. weight allowed	50 kg
Weight (without hosing)	810 kg

HYDRAULIC SYSTEM

Powerpack	Diesel hydraulic powered
Filtration size (pressure / return)	20 µ / 10 µ Quick couplers for kidney filtration
Oil tank volume	330 liters
Oil tank filling pump	Electric
Cooler for hydraulic oil	OA30 oil-to-air (30 kW)

DRILLING CONTROL SYSTEM

Type of control system	THC561 (TS2-362)
Operating principle	Hydraulic control
Manual boom control	Direct control Fully proportional Hydraulic parallelism
Drilling control	Manual collaring Feed / percussion pressure control Feed / percussion pressure monitoring Anti-jamming system Flushing control (On / Off / Auto.)
Drilling safety	Boom movements inhibition switches

ELECTRIC SYSTEM

Main switch gear	MSE 5 (24 V)
IP classification	Specification TS2-132
Sealed AGM batteries	2 x 12 V, 95 Ah
Front lights (combined working and driving)	4 x 50 W LED (4 200 lm, 6 000 K)
Rear lights (combined working and driving)	4 x 50 W LED (4 200 lm, 6 000 K)
Search light	Remoted with cabin: 1 x 40W LED (2 300 lm, 5 700 K) Manual with canopy: 1 x 17W LED (600 lm, 6 000K)
Rear brake / parking lights	2 x Red LED

AIR AND WATER SYSTEM

Flushing of holes	By water
Water booster pump type	WBP1 hydraulic driven
Water pump capacity	33 l/min at 15 bar (input pressure = 4 bar)
Water pump inlet pressure	2 bar (Min.)
Flushing water pressure	10 - 15 bar
Shank lubrication device	SLU1 (Air / oil mist)
Air compressor	1 m³/min at 7 bar, hydraulic driven
Oil consumption	100 g/h
Air consumption	250 l/min

OPERATOR'S SAFETY CABIN

Standard cabin	FOPS / ROPS (ISO 3449 / 3471) Height 2 920 mm
Operation	Standing drilling, seated tramming
Sound pressure level according to EN 16228	Operator station: 80 dB(A)
Operator's seat	Ergonomic T-back seat
Air conditioning	Cooling only
Tramming cameras	On rear frame and cabin or canopy

2. SANDVIK DS312D - ROCK SUPPORT BOLTER

CARRIER

Type of carrier	NC5-17
Steering system	Frame steering
Carrier articulation	± 38°
Rear axle oscillation	± 10°
Ground clearance	320 mm
Diesel engine	Deutz TCD2012, 100 kW, Tier 3, Stage IIIA, China 3
Exhaust catalyzer	Standard
Transmission	Hydrostatic, automotive
Axles	Dana Spicer 123 (front and rear) with extended differential breathers
Tires	12.00-20 foam filled tires
Service brakes	Hydrostatic and positive braking
Parking and emergency brakes	Hydraulic oil immersed multiple disc brakes on both brakes
Tramming speed	12 km/h (horizontal) 5 km/h (14%=1:7=8°)
Gradeability / sideways tilt	Max. 15° / 5° (according to ISO 18758)
Fuel tank	160 liters
Tramming oil tank	55 liters
Carrier stabilization	2 x Telescopic (front) 2 x Vertical (rear)
Bolt storage	Left side
Tramming alarm	Standard
MySandvik insight	Remote monitoring system
Documentation	1 x Operator's manual 1 x Technical manual (in English only) 1 x Parts manual (in English only) 2 x USB key of manuals (PDF files) 1 x Online Parts manuals (MySandvik)


OPTIONAL FEATURES AND PACKAGES

Hydraulic rock drill	
*RHR50 rotary drill	Instead of RD314 (drilling line)
Boom	
*Type of boom	SB70S instead of B26XLB (with SBI) B26B instead of B26XLB
Boom suspension system	Specification TS15-232
Bolting option	
*Bolting alternatives	GCR, GCC, WI, S, M
Two bolt lengths carousel	For SBH10 and SBH8
Grabbers extension	2 x extensions for SB40SH
Bolting head oiler	For GCC and GCR system (TS2-291)
Rod retainer on SBH	For manual extension drilling with optional rod handler
*Instrumentation package	SBI (TS2-085), with SB70S boom
Hydraulic system	
*Biodegradable oils	Condat HFDU68 Flame Proof
Drilling control system	
Access detector system	Mandatory in Europe (TS2-211)
Access protector system	Mandatory in Canada (TS2-211)
Electric system	
Battery jump start	Optional
Amber flashing light	LED (24 V)


OPTIONAL FEATURES AND PACKAGES

Cleaning system	
HP system with reel	Up to 180 bar (TS2-343)
Greasing systems	
Centralized greasing points	Specification TS2-463
Manual system	Greasing gun and cartridge with hose reel (TS2-463)
Automatic system	Carrier only (TS2-463)
Air and water system	
Air mist flushing kit	Specification TS2-285
*Air compressor	2.8 m³/min (7 bar), hydraulic driven
Water hose with hooks	32 mm (1¼"), 80 meters
Dry drilling	Imeg X125 dust collector with CT28H, 2.8 m³/min
Operator's safety cabin / canopy	
*Safety canopy	FOPS (ISO 3449)
*Low cabin	FOPS / ROPS certification
Cabin heating	Height 2 670 mm,
Cabin audio system	During drilling and tramming
Safety grill	Radio / MP3 / Bluetooth and loudspeakers
	For canopy or cabin
Fire suppression system	
Hand held fire extinguisher	1 x 6 kg Type ABC
Manual or automatic system	Ansul, 6 nozzles (TS2-460)
Auto. fire suppression system	Sandvik Eclipse™ (TS2-461)
Carrier	
*Diesel engine	Deutz TCD3.6, 100 kW, Tier 4F, Stage V, Canmet
Fast filling system	Complete
Brake release	Manual hand pump
MySandvik productivity	Remote monitoring system
Wheel chocks and holders	2 Sets
*Directional tramming alarm	Cri du Lynx®
Extra Items	
Spare rock drill	RD314, RD315
Tools and pressure test box	Specification TS2-429
Spare wheel assembly	Foam-filled
Special tools for rock drill	Field tool set (TS2-119)
Warranty extension	Complete tool set (TS2-118)
Documentation	One year (excl. Kazakhstan)
Video recorder and speedometer	Extra paper or PDF manuals
Package: Country specific	For CIS
options	LAM, USC, AUS, CE Package
Package: Harsh water packages	Basic or advanced (TS2-049)


**1 Replaces standard feature*

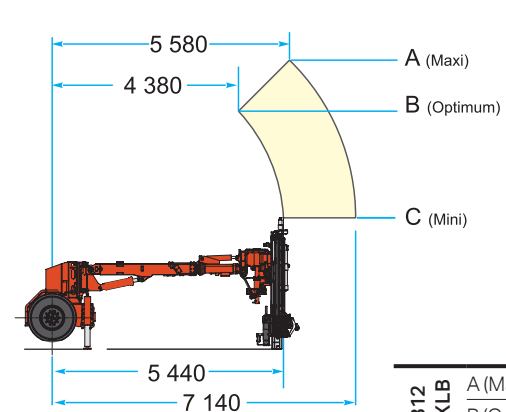


SB40SH FACE COVERAGE

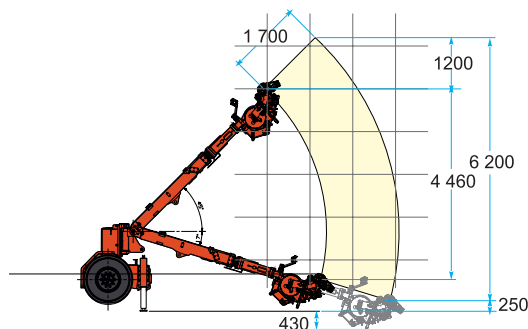






			SBH5	SBH6	SBH7	SBH8	SBH10
DS312 B26XLB	A (Maxi)	mm	6 810	7 030	7 090	7 340	7 650
	B (Optimum)	mm	5 610	5 830	5 890	6 140	6 460
	C (Mini)	mm	2 970	3 270	3 570	3 890	4 540

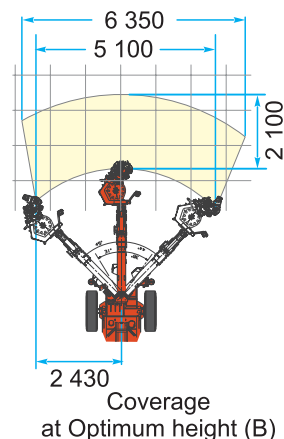


Coverage at Optimum height (B)



SB40SH ROOF COVERAGE

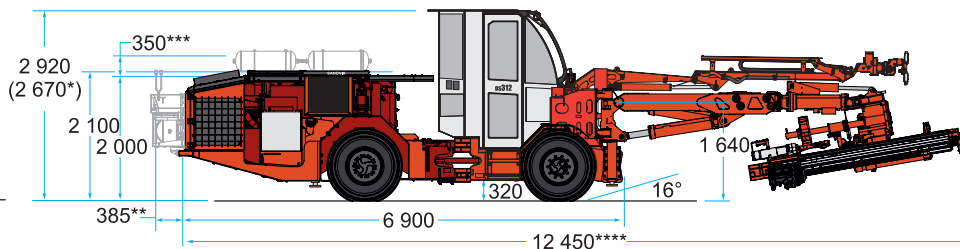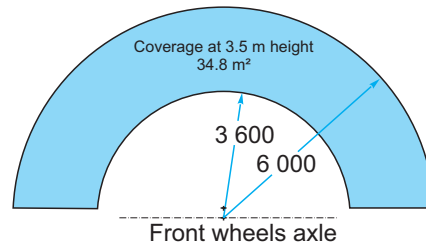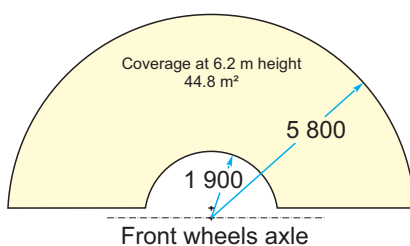

	External Radius (R)	Cornering (C)
DS312 (SBH7, B26B)	7 240	4 610
DS312 (SBH8, B26XLB)	7 800	5 080
DS312 (SBH7, SB70S)	7 750	5 040
DS312 (SBH8, SB70S)	7 910	5 200

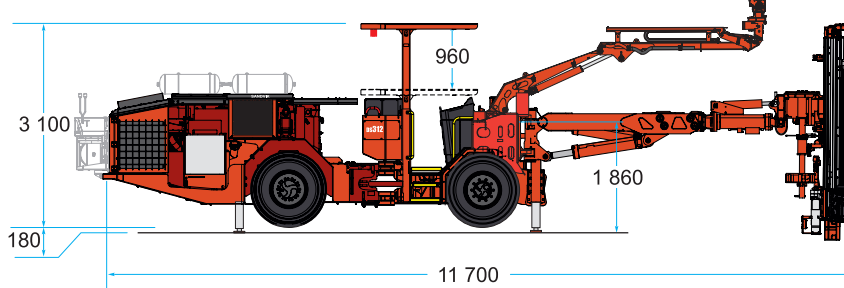

*) With low cabin option ***) With Sandvik eclipse option

****) With Air receiver option *****) Dimensions with SBH8 and stability at 3°

All dimensions in mm

Sandvik Mining and Rock Solutions reserves the right to make changes to the information on this data sheet without prior notification to users. Please contact a Sandvik representative for clarification on specifications and options.

ROCKTECHNOLOGY.SANDVIK

4. SANDVIK DS312D - ROCK SUPPORT BOLTER